

A machine
conceived for the
most demanding
farmers



options **mini chisel**

ovlac

ovlac **mini chisel**



400 mm CRG roller



400 mm Notched roller



450 or 540 mm Cage roller



520 mm Leafspring roller



Side depth control wheels



Rear tine harrow



Levelling harrow
(only for 3 row Minichisel)

		tines	working width m.	transport width m.	recom. power HP	weight (*)	tine spacing
mini ch 2 rows	MCH 9	9	2,7	2,7	70-80	780	27,5 cm.
	MCH 2-11	11	3	3	85-100	860	
	MCH 2-13	13	3,8	3,8	100-120	950	
	MCH 2-15P	2+11+2	4	3	115-135	1380	
	MCH 2-17P	3+11+3	4,6	3	130-150	1530	
	MCH 2-19P	4+11+4	5,15	3	140-160	1680	
	MCH 2-21P	5+11+5	5,7	3	155-180	1860	
	MCH 2-23P	11+12	6,25	3	170-195	2150	
	MCH 2-25P	12+13	6,8	3	185-210	2280	
mini ch-a 3 rows	MCH 2-27P	13+14	7,35	3	200-235	2400	23 cm.
	MCH 3-13	13	3	3	90-105	910	
	MCH 3-16	16	3,7	4	110-130	1060	
	MCH 3-16P	2+12+2	3,7	3	110-130	1580	
	MCH 3-19P	3+13+3	4,4	3	130-150	1725	
	MCH 3-22P	5+12+5	5,05	3	155-175	1990	
	MCH 3-25P	6+13+6	5,75	3	175-200	2180	
	MCH 3-28P	14+14	6,45	3	195-225	2495	
	MCH 3-31P	15+16	7,15	3	215-250	2650	
mini ch-a 3 rows	MCH-A 3/31	9+13+9	7,15	3	217	5790	23 cm.
	MCH-A 3/35	11+13+11	8	3	245	6080	
	MCH-A 3/39	13+13+13	9	3	273	6370	
	MCH-A 3/43	15+13+15	10	3	301	6660	

* With CGR Roller

Poligono Industrial, P-163 / 165
34200 Venta de Baños
Palencia / España
t. +34 979 76 10 11
f. +34 979 76 10 22
comercial@ovlac.com
www.ovlac.com




ovlac

ovlac




ovlac mini chisel

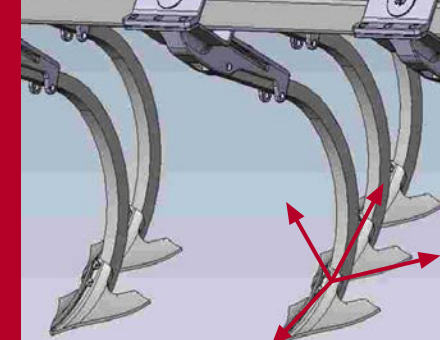

Dimensional security



Rubber suspension
100% maintenance-free

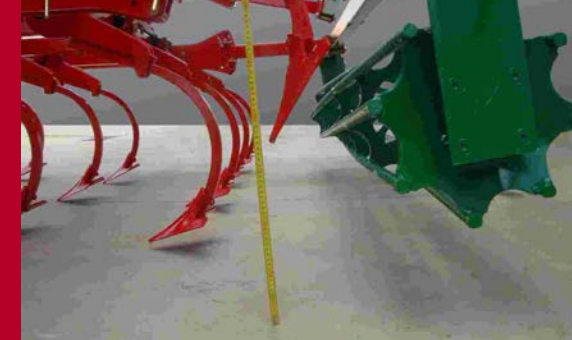

More than 30 cm. trip up height

There is also a trailed version of the **MCH**, the **MCH-A**, which can reach a working width of up to 10 m. for tractors of more than 250 HP. Despite its size, the **MCH-A** is designed for a great ease of use thanks to its two hydraulic memory systems. The first one acts on the wheels to keep the working depth after the turn at the headland. The second one keeps the working angle of the tines after folding the **MCH-A**.

mini ch-a



mini ch



The **Minichisel** folds in 3 when it is less than 6 m wide or vertically in 2 pieces when it is a larger version



mini ch-a

When folded, the **MCH-A** reduces its width to 3 m. A large part of the weight is then transferred to the tractor thus achieving a good balance for a safe transport on the road



Ovlac's **MCH** is a unique stubble cultivator which is available in 2 or 3 rows, mounted or trailed and in working widths from 2,5 up to 10 m

Its 35x35 mm tines (30x30 in option) allow to work from 3 to 25 cm. deep in the most extreme conditions. Indeed, the auto reset protection system based on rubber suspensions patented by **Ovlac** (it was typically used just on short disc harrows) provides a 3-dimensional protection in no matter which direction, upwards or sideways.

This rubber suspension system is the only one in the market which is really 100% maintenance-free as it has no greasers nor moving parts at all like bushes or pins which are subject to wear and, therefore, to slack. With **Ovlac**'s **MCH** just say good bye to any play.

Another remarkable advantage of **Ovlac**'s stone protection system is that it allows the tine to trip up more than 30 cm thus allowing to overcome any obstacle.

mini ch 3 rows

mini ch 2 rows

