



A Passion for Soil

SHALLOW PLOUGH

Maximum Profitability



MINI

A BIG FAMILY

Ovlac's Mini shallow plough has been conceived to combine the advantages of traditional and minimum tillage; in other words, it gathers both output and efficiency for the sake of profitability.

Traditional ploughing is, without any doubt, the most ecological and sustainable method of plague and disease control. In organic farming, ploughing is almost the only possible soil management system, as chemical products are forbidden.

The **Mini** shallow plough is an **Ovlac** innovative development, offering unequal performance. It has specifically been designed as a shallow plough able to cope with large amounts of stubble at limited depths (8-20 cm). This superficial turning over of the soil favours the formation of cavities where air and water adequately decompose and transform stubble, creating humus which increases soil natural fertility and, in turn, long-term productivity. Furthermore, plough-shares break soil capilarity, thus contributing to lessen evaporation and keep moisture in the deep layers, especially in dry periods.

Another advantage of the **Mini** shallow plough is that it works on-land, thus totally preventing soil compaction on the furrow bottom. Also, the superficial work of the **Mini** implies a more than proportionate decrease in the tractor power consumption. Ploughing 15 cm deep

requires less than half the power needed to plough 30 cm. This means that the same tractor will be able to plough up to 40% wider with a **Mini** as compared to a traditional plough. All things considered, the **Mini** combines traditional ploughing with working widths characteristic of minimum till techniques.

Finally, we must add to this cutting down of operational costs the **Mini's** own conception: simple and light, but (or because of it) robust. All are advantages.


QUALITY MANUFACTURING

The **Mini** undergoes a manufacturing process with plenty of controls, starting with the use of top quality raw materials and the most modern and accurate production means in order to get a perfect finish. All critical parts are made in HEL (High Elastic Limit) steel. And frame, headstock and beams are totally welded by robots. The final output: a solid and reliable **Mini**.

As regards wearing parts, all of them are equal to none: both reversible points and shares are drop-forged for maximum strength and endurance; mouldboards are 8 mm thick borochrome steel. All pieces are hardened and tempered in order to attain the best possible compromise between tenacity and wearability.

 **ovlac genuine**

The quality of the original. Forged shares, 8mm mouldboards,... and always the leader's backup. Do not feel tempted by imitations.

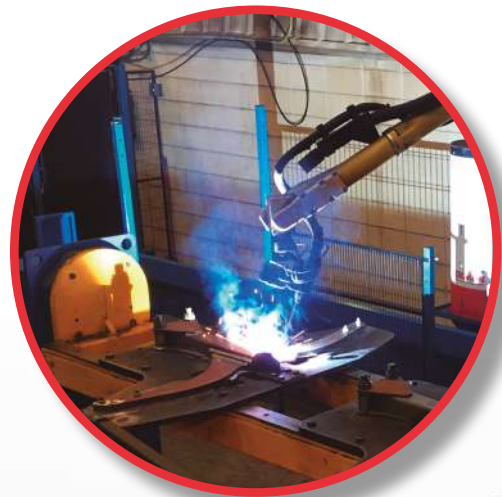



“Present all over Europe
with great success”



MINI GERMANY



MINI FRANCE



CONVENTIONAL MINI

Mini BF / HF



Mini HF

In Europe there are still vast regions where ploughing takes place with conventional ploughs, and not reversible. This refers mainly to Southern Europe as well to some areas in Central Europe. For this purpose Ovlac has the **Mini BF** and **Mini HF**. The former features leafspring auto-reset security system; the latter, hydraulic, with break away force regulation depending on soil conditions. Both security systems are 100% maintenance-free in order to reduce downtime to a minimum.




Mini BF



Mini HF body



Mini BF body

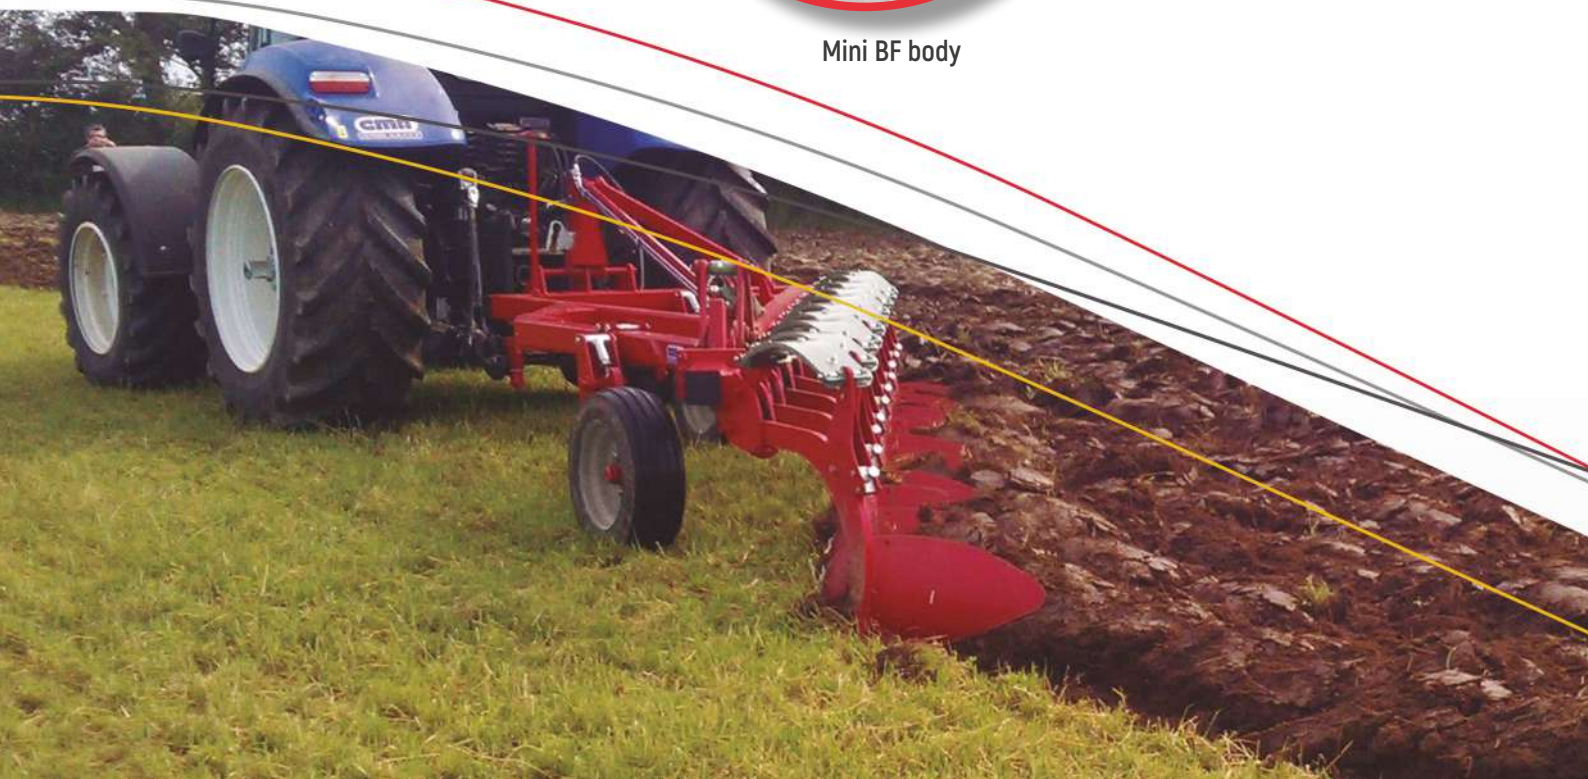



Just like the reversible **Mini** range, the conventional one covers three frame sizes: 6, 8 and 10 bodies. Each of these frames can be extended with the addition of one or two extra bodies, which can just be bolted-on to the main frame, or hydraulically foldable, so as to reduce the total plough length and weight while road transport.

Optional hydraulic folding of rear bodies in order to reduce weight during transport or, when necessary, to work with fewer bodies



Plan view of Mini-6, Mini-8 and Mini-10 ploughs. In shaded colour, position of optional bolted-on rear wheel in contrast with the standard rear wheel.

Mini HF 8+2



REVERSIBLE MINI

Mini NF / NH



Headstock and frame support

In terms of farm machinery, experience is certainly an asset. With over 20 years of experience, we can openly state that Ovlac's Mini is a reference in vast areas in Europe.

Ever since the first machines were produced back in 2003, successive improvements and innovations have been steadily implemented thanks to the feedback from farmers from more than 15 countries as well as to gathered experience. At Ovlac we listen to our customers who, as professionals, can revert with interesting remarks in order to further optimize our machines.

Nowadays, the **Mini** is a shallow plough with an undisputable reputation as regards both reliability and efficiency. Proven.



Transport position



MINI NF 8+1 HOLLAND



Mini NF

The last generation of the reversible **Mini**, the **Mini-N**, is available with shear bolt security for not too stony soils (**Mini NF**) or with hydraulic auto-reset system (**Mini NH**), with adjustable breakaway force depending on soil conditions. Thus, in hard or compacted soil, pressure can be increased in order to make the plough penetrate easier as well as to keep the working position of the bodies. On the contrary, under stony conditions we will decrease pressure so as not to bring out stones up to the surface. This possibility to adjust the working pressure provides great flexibility when adapting the Mini to different soil types.

The **Mini-N** range is based on 3 main frames, **Mini-N-5**, **Mini-N-7** and **Mini-N-9**, which can be extended with one or two additional bolt-on bodies each.


The 5-furrow frame is equipped with a 120 series headstock, with a 110 mm diameter shaft. 7 and 9-furrow frames come with an oversized 150 series headstock, with a solid 140 mm diameter shaft.




Mini NH



The 5-furrow frame is equipped with a 120 series headstock, with a 110mm diameter shaft. 7 and 9-furrow frames come with an oversized 150 series headstock, with a 140 mm diameter shaft

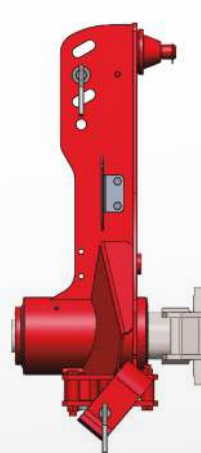

Mini-N-5

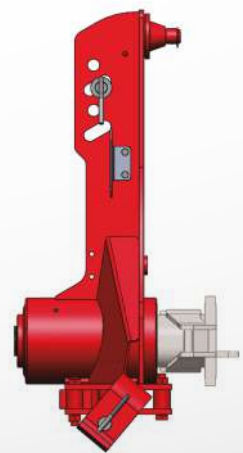

Mini-N-7/9

REVERSIBLE MINI (CONTINUED)


Mini NF / NH

WHAT MAKES US UNIQUE



The **Mini-N** comes as standard with our oscillating drawbar for automatic self-alignment.

The oscillating hitch makes it possible for the plough to move freely around a central pivoting point in the cross shaft and to find by itself the perfect balance between the side pressure exerted on the mouldboards and the landsides. Correction varies a maximum of $+10^\circ$ to -10° .

Therefore, it is no longer necessary to adopt complicated adjustments in order to regulate the draw line so as to make the plough work perfectly aligned. Alignment is automatically achieved with no need of intervention from the operator.

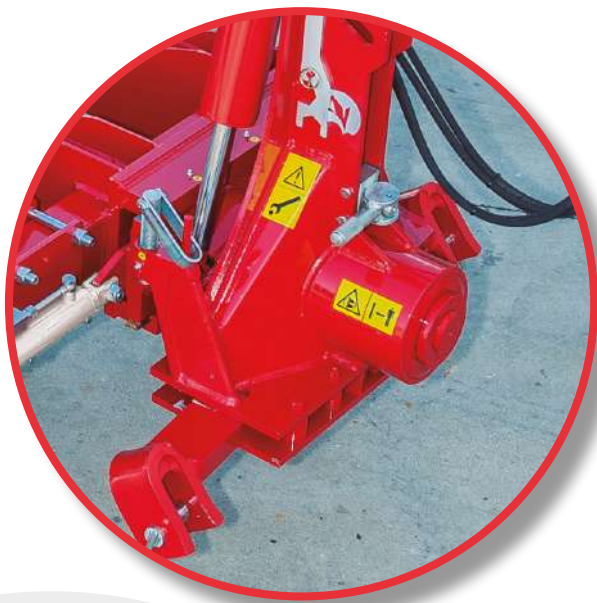

Oscillating cross shaft

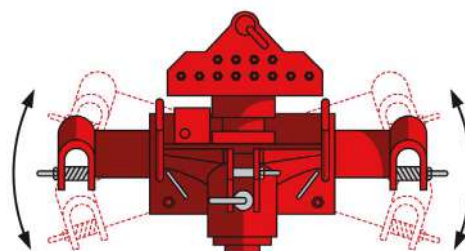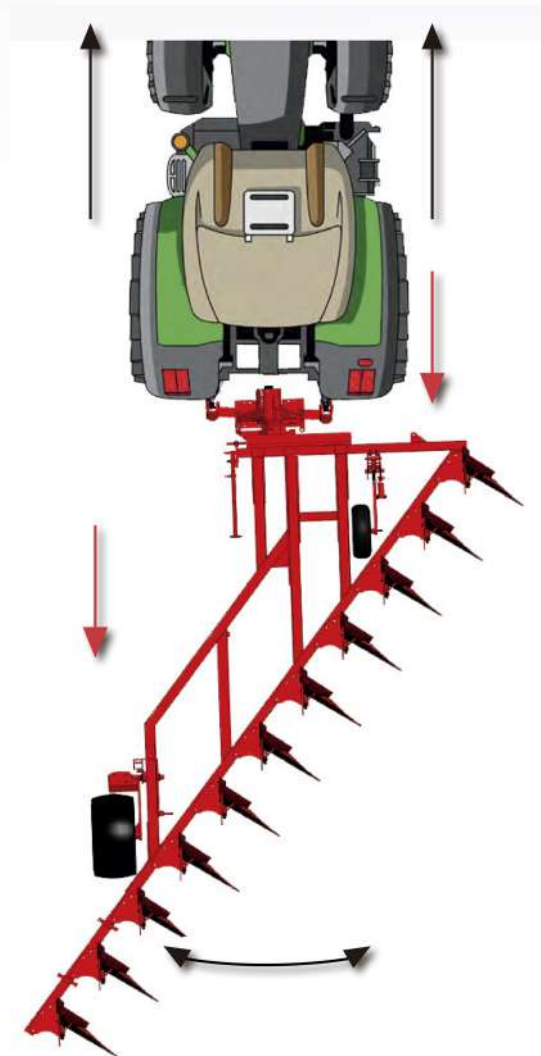

Correction from $+10^\circ$ to -10°



HYDRAULIC ADJUSTMENT OF FIRST FURROW WIDTH:

The first furrow width adjustment of the **Mini-N**, be it mechanical or hydraulic, makes it possible to set the first furrow at the desired spot depending on the tractor width. Once set, this width can be easily varied any time in order to get closer or further away from the furrow if the working conditions, like hills for instance, make it necessary.

The mechanical adjustment can be made using the spanner being furnished with each machine whereas the hydraulic system is adjusted by means of a double-effect hydraulic cylinder.

The sliding plates are made in 500 HEL steel to guarantee many hectares of trouble-free work even with the most demanding use.

AUTO REST PROTECTION FOR THE MOST EXTREME CONDITIONS:

The 3D articulated security Rod linking the leg holder to the main frame has been designed to withstand the most rigorous conditions. It provides protection from sideways force as well as enabling break-back.



SEMIMOUNED MINI

Mini S



The semimounted **Mini** has been specifically developed for big states and high-power tractors. Available up to 13 furrows, the Mini S grants a working width of no less than 5 m. In other words, 3 ha/h can be ploughed at ease, which says a lot about its performance.

The **Mini S** is based upon the same frame base being used for our traditional on-land semimounted ploughs.

In order to ease the turnover of the plough at the headland, the **Mini S** features an articulation at the front which folds in the front bodies thus reducing the turnover radius and minimizing the effort on the tractor arms and headstock.



In transport





Exactly like in the mounted range, the **Mini S** is available either with shear bolt stone protection or with hydraulic auto reset system with adjustable breakaway force depending on the working conditions.

“ Unrivalled performance:
more than 3 ha/h ”



MINI


Options



Slatted mouldboards for sticky conditions- Trashboards to improve burial of trash



Extra large forged share. 12 cm longer than standard share

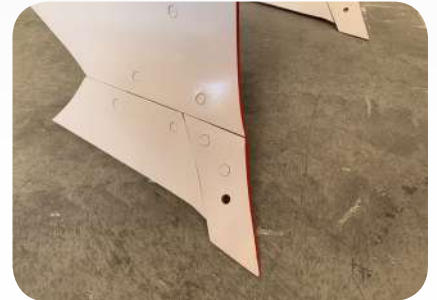

EcoFlow shares. Available in short or long versions



"Pan- Cracker"



Landslide extension, for better plough stability



1st furrow hydraulic width adjustment



Depth control wheel. Available as 6.00*9, 200/60, 250/65, 340/55, 280/70 y 380/55



Transport wheel available as 200/60 14,5, 250/65 14,5, 340/55 16" and 380/55 17"



Front depth control wheel available as 6.00*9, 200/60 14,5" and 250/65 14,5"



Hydraulic depth control or combi wheel for transport and depth control



Inner depth control wheel (available for Mini-N 7 and 9 frames)



Lights kit



Headstock lock for transport



WHEEL OPTIONS

MINI-BF/HF	6 / 6+1 / 6+2		8 / 8+1 / 8+2		10 / 10+1 / 10+2	
Wheel type	Front wheel	Rear wheel	Front wheel	Rear wheel	Front wheel	Rear wheel
6.00 X 9" 10 PR	-	0	0	0	0	0
200/60 14.5" 10 PR	-	X	X	X	X	X
250/65 14.5" 12 PR	-	X	-	X	-	X
340/55 16" 14 PR	-	X	-	X	-	X
380/55 17" 14 PR	-	X	-	X	-	X



6.00 x 9" 10PR



200/60 14.5" 10PR



250/65 14.5" 12PR



340/55 16" 14PR



380/55 17" 14PR

MINI-NF/NH	5 / 5+1 / 5+2		7 / 7+1 / 7+2		9 / 9+1 / 9+2	
Wheel type	Front wheel	Rear wheel*	Front wheel	Rear wheel*	Front wheel	Rear wheel*
6.00 X 9" 10 PR	X	X	X	X	X	X
200/60 14.5" 10 PR	-	X	X	X	X	X
250/65 14.5" 12 PR	-	X	-	X	X	X
340/55 16" 14 PR	-	X	-	X	-	X
380/55 17" 14 PR	-	X	-	X	-	X

* Available as depth control or combi wheel (except for 6.00x9" 10PR)

MINI-SF/SH	12 / 12+1	
Wheel type	Front wheel	Rear wheel*
250/65 14.5" 12PR	0	-
340/55 16" 14 PR	-	-
380/55 17" 14PR	-	-
500/50 17" 18 PR	-	0

KEY SYMBOLS	
0	STANDARD
X	OPTIONAL
-	NOT AVAILABLE



280/70 16"



550/50 17" 18PR

MINI

Summary

3 MODELS



Conventional Mini from 6 to 12 bodies:
Mini-BF/HF



Mounted reversible Mini from 6 to 11 bodies:
Mini-NF/NH



Semi-mounted Mini. Available in 12 and 13 bodies:
Mini-SF/SH

3 SECURITY SYSTEMS



Shear-bolt security system:
Mini-NF, Mini-SF



Leafspring security system:
Mini-BF



Hydraulic auto-reset system:
Mini-HF, Mini-NH, Mini-SH

3 GOOD REASONS



Operating costs up to 40% lower than with a traditional plough.



Weed and disease control without the use of pesticides.



Optimal finish gathering the advantages of turning and the quality of minimum tillage.



MINI

Technical Features

MODEL	Working width (cm)	Recommended Power (HP)	Point to point (cm)	Underbeam clearance (cm)	Weight (kg) BF/HF
Mini 6	195	105-135			920
Mini 6+1	228	120-155	61	70	1.030
Mini 6+2	260	140-175			1.140
Mini 8	260	140-175			1.216
Mini 8+1	293	160-200	61	70	1.303
Mini 8+2	325	180-220			1.390
Mini 10	325	180-220			1.600
Mini 10+1	358	200-240	61	70	1.710
Mini 10+2	390	220-265			1.820

MODEL	Working width (cm)	Recommended Power (HP)	Point to point (cm)	Underbeam clearance (cm)	Weight (kg) NF	Weight (kg) NH
Mini N 5	192	105-135			1.200	1.400
Mini N 5+1	230	120-155	66	70	1.340	1.560
Mini N 5+2	268	140-175			1.480	1.720
Mini N 7	268	140-175			1.570	1.830
Mini N 7+1	306	160-200	66	70	1.710	1.990
Mini N 7+2	345	180-220			1.850	2.150
Mini N 9	345	180-220			1.915	2.265
Mini N 9+1	383	200-240	66	70	2.055	2.425
Mini N 9+2	422	220-265			2.195	2.600

MODEL	Working width (cm)	Recommended Power (HP)	Point to point (cm)	Underbeam clearance (cm)	Weight (kg) SF	Weight (kg) SH
Mini NS 12	460	250-275			3.840	4.680
Mini NS 12+1	498	260-300	66	70	3.950	4.510



A SOLUTION FOR ANY FIELD



Ploughs



Trailed Ploughs



Minichisel



Versatill



Maxidisc



Eurodisc



Minichisel Vineyard



Reptill

© All rights reserved.



Junta de Castilla y León



Europa impulsa nuestro crecimiento

FONDO EUROPEO DE DESARROLLO REGIONAL



UNION EUROPEA



Polígono Industrial, P-163 / 165 - 34200 - Venta de Baños
 Palencia / Spain - **Tel.: +34 979 76 10 11** - Fax: +34 979 76 10 22
 comercial@ovlac.com - **www.ovlac.com**